

## •• kami CIC




- 10k HD Sound
- Adaptive Noise Guard
- Expansion (Squelch)
- Wind Shield
- Adaptive Feedback Guard
- Feedback Check
- 12 WDRC-Channels
- Multi Channel MPO
- Up to 4 Programs
- Low Battery Indicator
- Start-up Delay
- Data Logging
- Live View
- MySound!
- Water repellent coating
- Option: Switch or Volume control, Tinnitus-Module, Windscreen/ Microphoneshield

### Technical Data

Technical Data	EN 60118-7:2005 (2cm <sup>3</sup> -coupler)	EN 60118-0/A1:1994 (Ear Simulator)	ANSI S3.22-2009 (2cm <sup>3</sup> -coupler)
<b>Operating Voltage</b>	1.30 V	1.30 V	1.30 V
<b>Acoustic Gain (50 dB SPL)</b>			
HFA	42 dB	-	42 dB
1600 Hz	-	49 dB	-
Peak Value	50 dB	60 dB	50 dB
<b>Max. Output (90 dB SPL)</b>			
HFA	105 dB SPL	-	105 dB SPL
1600 Hz	-	112 dB SPL	-
Peak Value	110 dB SPL	121 dB SPL	110 dB SPL
<b>Reference Test Gain</b>	28 dB	35 dB	28 dB
<b>Frequency Range</b>	100 Hz-8800 Hz	100 Hz-9800 Hz	100 Hz-8800 Hz
<b>Total Harmonic Distortions</b>			
500/800/1600 Hz	2/2/2 %	2/3/2 %	2/2/2 %
<b>Equivalent Input Noise</b>	25 dB	28 dB	25 dB
<b>Battery Current</b>	1.32 mA	1.23 mA	1.32 mA
<b>Battery Type</b>	10	10	10
<b>Average Battery Life (Zinc-Air)</b>	60 h	60 h	60 h
<b>Tinnitusmasker<sup>®</sup></b>			
Noise Level (RMS)	100	110	100
Frequency Range	100 Hz-8000 Hz	100 Hz-8000 Hz	100 Hz-8000 Hz

\* Only when Tinnitus-Module is activated in audifit.

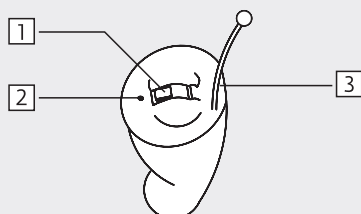

- 1 Battery compartment
- 2 Microphone inlet
- 3 Removal handle

### Standard




### Programming

Cable:	Cable Set J or K
Battery:	with or without Battery
Progr.-Box:	HI-PRO HI-PRO II HI-PRO USB NOAHlink
Software:	audifit 5.5




●● kami CIC

Fitting Range

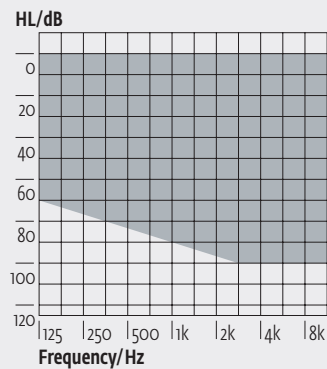


Third Octave Band Noise\*

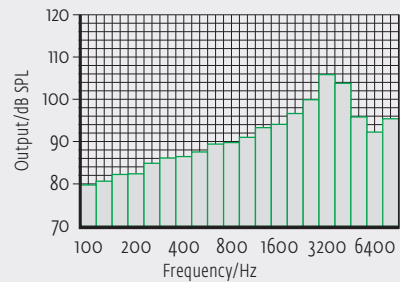


\* All curves are measured with 2cm<sup>3</sup>-coupler (EN 60318-4:2010). Only when Tinnitus-Module is activated in audifit.

All curves are measured with Ear Simulator (EN 60318-4:2010) in reference setting.


Maximum Output

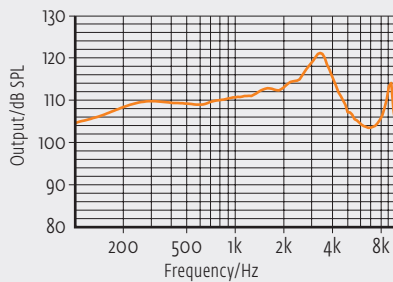

Acoustic Gain

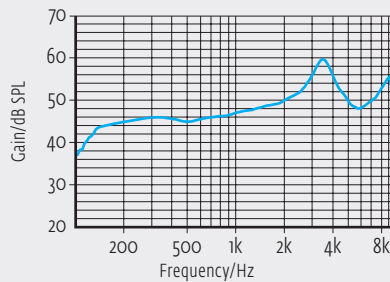


Frequency Response (RTG)

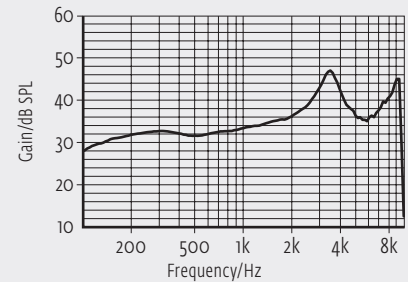


All curves are measured with 2cm<sup>3</sup>-coupler (EN 60318-5:2006) in reference setting.


Maximum Output

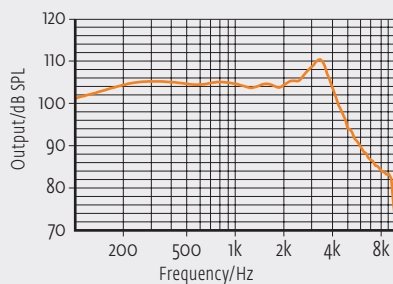

Acoustic Gain

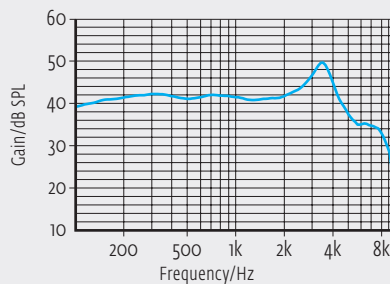

Frequency Response (RTG)

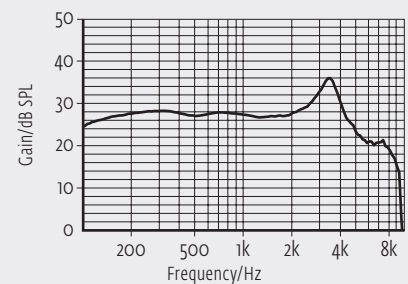

On account of the complex signal processing, the measurements of the represented curves are only possible in default setting of the device and under use of the current valid software version. Effects of the separate parameters see software.